


Universal catalytic converter 0.7 - 2.5

Universal S409 stainless steel catalytic converter with S-type metal cartridge with 3 cores for increased performance and durability. Compatible with gasoline engines and LPG systems.

- Permanent temperature resistance of 950 °C
- Instantaneous temperature resistance of 1100 °C

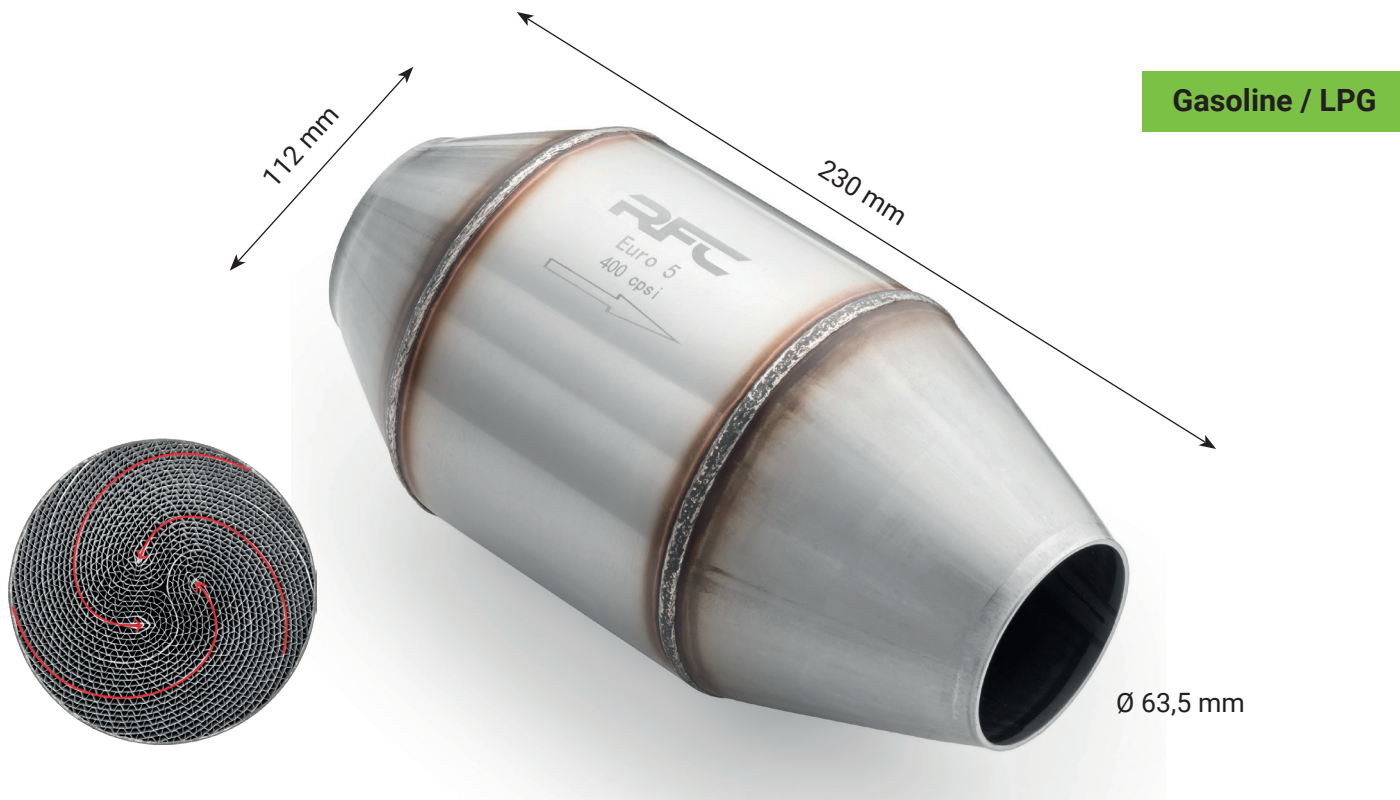

Symbol	Engine capacity	Standard	Catalyst application	Cartridge type	Capacity
KSS11LCC0064	0.7 - 2.5	Euro 6	Tuning	Metal - type S	400 CPSI
KSS11LCC0066					600 CPSI