


Universal catalytic converter 2.5 - 5.0

Universal S409 stainless steel catalytic converter with S-type metal cartridge with 3 cores for increased performance and durability. Compatible with gasoline engines and LPG systems.

- Permanent temperature resistance of 950 °C
- Instantaneous temperature resistance of 1100 °C

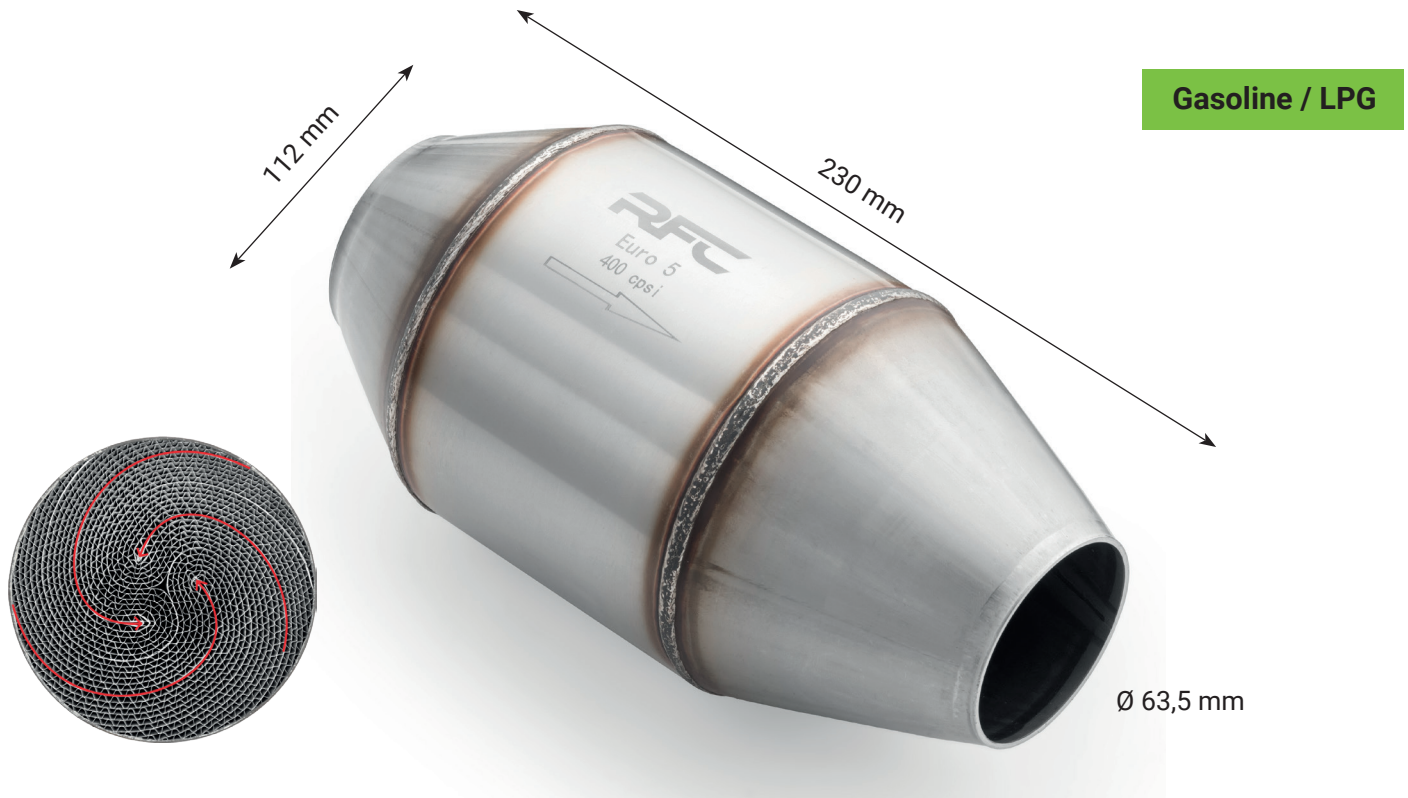

Symbol	Engine capacity	Standard	Catalyst application	Cartridge type	Capacity
KSS21LCC0054	2.5 - 5.0	Euro 5	Tuning	Metal - type S	400 CPSI
KSS21LCC0054		Euro 6			400 CPSI
KSS21LCC0066					600 CPSI